

Using a Laguerre-Gaussian beam to trap and cool the rotational motion of a mirror

M. Bhattacharya and P. Meystre

*B2 Institute, Department of Physics and College of Optical Sciences
The University of Arizona, Tucson, Arizona 85721*

(Dated: February 1, 2008)

We show theoretically that it is possible to trap and cool the rotational motion of a macroscopic mirror made of a perfectly reflecting spiral phase element using orbital angular momentum transfer from a Laguerre-Gaussian optical field. This technique offers a promising route to the placement of the rotor in its quantum mechanical ground state in the presence of thermal noise. It also opens up the possibility of simultaneously cooling a vibrational mode of the same mirror. Lastly, the proposed design may serve as a sensitive torsional balance in the quantum regime.

PACS numbers: 42.50.Pq, 42.65.Sf, 85.85.+j, 04.80.Nn

The optical control of the quantum mechanical center-of-mass motion of ions, neutral atoms, molecules and microscopic-scale objects has formed a dominant theme in atomic, molecular and optical physics in recent years [1, 2]. These techniques are now being transferred to the macroscopic regime, where laser light has been found to be effective in cooling and trapping, for example, gram-scale mirrors [3]. Such efforts are part of the rapidly emerging field of ‘quantum optomechanics’, one of the ambitious aims of which is to place a macroscopic object in its quantum mechanical ground state [4, 5, 6, 7]. The accomplishment of this task would open up a host of fascinating scenarios ranging from the fundamental [8, 9, 10] to the applied [11, 12, 13], all following from the manifestation of quantum mechanical behavior in classical objects.

So far most efforts have been aimed at quantizing linearly vibrating oscillators, which are prototypical mechanical objects [4, 5, 6]. Further, oscillators with breathing modes have been considered, driven by the centrifugal effects of radiation pressure [7, 14, 15]. A torsional mode has also been examined experimentally [16], but its effective dynamics was essentially vibrational in that the interaction mechanism was the mirror’s exchange of *linear* momentum with radiation, a fact true of all the examples cited above.

In this Letter we point out the possibility of quantizing instead a *rotational* mode of a classical torsional oscillator using the exchange of *angular* momentum with a radiation field. Combined with the use of the linear momentum of light, this results in the potential to simultaneously quantize a vibrational as well as a rotational mode of motion of an oscillator using the same radiation field. Also, (torque-induced) rotation of the mirror manifests itself as a change in cavity length, which may be measurable to a sensitivity better than the quantum noise limit, based on recent analyses [17, 18]. We therefore expect our proposed design to possibly find use as a sensitive torque sensor, (i.e. a torsion balance) operating in the quantum regime.

Specifically we consider the mechanical effect of a

Laguerre-Gaussian beam interacting with a macroscopic mirror. In addition to their intrinsic spin angular momentum $\leq \hbar$, photons in such beams also carry an integral orbital angular momentum $l\hbar$, see [19] and references therein. It has been experimentally demonstrated that Laguerre-Gaussian beams can exert a torque on microscopic particles [20, 21] as well as on a Bose-Einstein condensate, where they create vortices [22]. The main result of our analysis is to demonstrate that the transfer of orbital angular momentum can be large enough to have a significant effect on macroscopic objects as well and can dramatically cool their rotational motion.

The typical experimental set-up used to achieve radiation cooling and trapping of a *vibrating* mirror [4] is schematically shown in Fig.1(a). It consists of an optical cavity where the input coupler is fixed and the rear mirror is suspended from a support and allowed to oscillate harmonically along the cavity axis. Usually the input coupler is weakly transmissive and the rear mirror is taken to be perfectly reflecting. Also, the input coupler is massive and the rear mirror micro- or nano-fabricated. The rear mirror can then be trapped (cooled) using a Gaussian laser beam tuned above (below) a cavity resonance.

We consider the rotational analog of Fig.1(a) shown in Fig.1(b). The optical mirrors of the vibrating cavity have been replaced by spiral phase elements which are commonly used to modify the azimuthal structure of laser beams either via reflection or transmission [23]. Given the wavelength of radiation being used they can be designed to impart a fixed topological charge to an incident beam. In what follows we assume a Gaussian beam, which has charge 0, to be incident on the cavity. The azimuthal structure of the input coupler is such that upon reflection from either side it *removes* a fixed charge $2l$ from the beam. The input coupler is also partially transparent and since the two sides have opposite winding it allows beams from either side to pass through with no change to their charge – an effect that has been experimentally observed for a Gaussian beam [23]. The perfectly reflecting rear mirror on the other hand, is de-

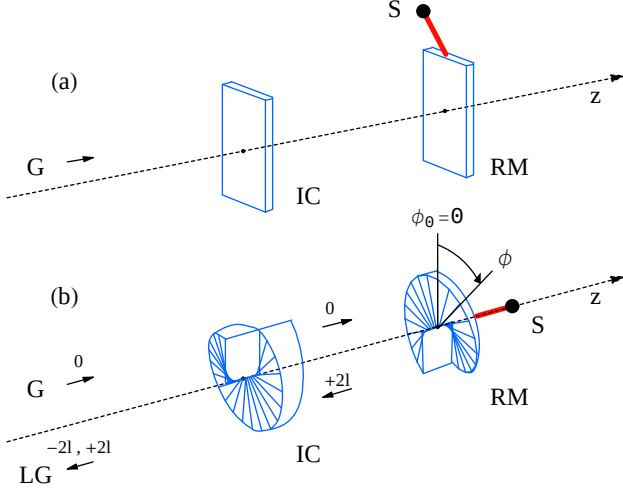


FIG. 1: (Color online). (a) A typical arrangement for trapping and cooling a vibrating mirror using linear momentum transfer from a Gaussian cavity mode (G). The cavity is formed by a fixed partially transparent input coupler (IC) and a movable perfectly reflecting rear mirror (RM), the latter being suspended from a support S. The RM vibrates along the z -axis. (b) The arrangement proposed in this work for trapping and cooling a rotating mirror using angular momentum exchange with a Laguerre-Gaussian (LG) mode. The cavity is formed by the IC and the RM, both spiral phase elements. The RM is mounted on a support S and can rotate about the z -axis. Its angular deflection from equilibrium ($\phi_0 = 0$) is indicated by the angle ϕ . The charge on the beams at various points has been indicated.

signed so that it *adds* a charge $2l$ to a beam. With these specifications in mind we follow the input beam through the set-up of Fig.1(b) where the charges at various positions along the z -axis have been indicated.

The Gaussian input beam first meets the input coupler. The reflected component has a charge $-2l$ while the transmitted beam has charge 0. The charge 0 beam reflected from the rear mirror gets charged to $2l$. Returning to the input coupler, reflection gives a mode with charge 0, while transmission gives a beam with charge $2l$. That this configuration provides self-consistent conditions for intra-cavity mode build-up has been noted before [24].

We assume that the rear mirror is a thin disk of mass M and radius R , so that its moment of inertia about the z -axis passing through its center is given by $I = MR^2/2$. The rear mirror is part of a torsional pendulum mounted on a support S and oscillating with angular frequency ω_ϕ . It has an equilibrium position $\phi_0 = 0$ in the absence of radiation, and undergoes angular deviations ϕ from that position that are small enough that they can be described harmonically ($\phi \ll 2\pi$).

Coupling between radiation and the rear mirror occurs because at each reflection a charge 0 photon acquires angular momentum $2l\hbar$ from the mirror. This happens once in every cavity round trip time $2L/c$, where L is

the length of the cavity and c is the velocity of light. The radiation torque on the rear mirror equals the angular momentum change per unit time $2l\hbar/(2L/c) = \hbar\xi_\phi$, where we refer to $\xi_\phi = cl/L$ as the *optorotational* coupling parameter. Accounting for the intracavity photon number the coupling between the radiation field and the mirror can be included in the model Hamiltonian

$$H_\phi = \hbar\omega_c a^\dagger a + \frac{L_z^2}{2I} + \frac{1}{2}I\omega_\phi^2 \phi^2 - \hbar\xi_\phi a^\dagger a \phi. \quad (1)$$

Here a ($a^\dagger$) are the bosonic annihilation (creation) operators for the cavity mode of frequency ω_c satisfying the commutation relation $[a, a^\dagger] = 1$. L_z is the angular momentum of the rear mirror about the intra-cavity axis and satisfies the commutation relation $[L_z, \phi] = -i\hbar$. The first term in H_ϕ describes the energy of the cavity mode, the next two terms the energy of the oscillating rear mirror and the last term the effect of radiation torque on the rear mirror.

The evolution of the dynamical variables in the Hamiltonian (1) is given by the Heisenberg equations of motion, to which we add damping and noise and obtain the corresponding quantum Langevin equations in the standard way [27]:

$$\begin{aligned} \dot{a} &= -i(\delta - \xi_\phi \phi)a - \frac{\gamma}{2}a + \sqrt{\gamma}a^{\text{in}}, \\ \dot{\phi} &= L_z/I, \\ \dot{L}_z &= -I\omega_\phi^2 \phi + \hbar\xi_\phi a^\dagger a - \frac{D_\phi}{I}L_z + \epsilon_\phi^{\text{in}}. \end{aligned} \quad (2)$$

Here $\delta = \omega_c - \omega_L$ is the detuning of the laser frequency ω_L from the cavity resonance, γ is the damping rate of the cavity, D_ϕ the intrinsic damping constant of the oscillating rear mirror and a^{in} is a noise operator describing the laser field incident on the cavity. The mean value $\langle a^{\text{in}}(t) \rangle = a_s^{\text{in}}$ describes the classical Gaussian field, and the delta-correlated fluctuations $\langle \delta a^{\text{in}}(t) \delta a^{\text{in},\dagger}(t') \rangle = \delta(t-t')$ add vacuum noise to the cavity modes. The Brownian noise operator $\epsilon_\phi^{\text{in}}$ represents the mechanical noise that couples to the mirror from the environment. Its mean value is zero and its fluctuations are correlated at temperature T as [27]

$$\langle \delta \epsilon_\phi^{\text{in}}(t) \delta \epsilon_\phi^{\text{in}}(t') \rangle = D_\phi \int_{-\infty}^{\infty} \frac{d\omega}{2\pi} e^{-i\omega(t-t')} \hbar\omega \left[1 + \coth\left(\frac{\hbar\omega}{2k_B T}\right) \right], \quad (3)$$

where k_B is Boltzmann's constant. The steady-state values of the dynamical variables are easily found to be

$$a_s = \frac{\sqrt{\gamma}|a_s^{\text{in}}|}{[(\frac{\gamma}{2})^2 + (\delta - \xi_\phi \phi_s)^2]^{1/2}}, \quad \phi_s = \frac{\hbar\xi_\phi a_s^2}{I\omega_\phi^2}, \quad L_{z,s} = 0, \quad (4)$$

where the phase of the input field a_s^{in} has been chosen such that a_s is real. For future use we define the input power as $P_{\text{in}} = \hbar\omega_c |a_s^{\text{in}}|^2$. Note that the coupled steady-state equations for a_s and ϕ_s can be solved explicitly to yield solutions that display bistability for high enough

P_{in} [28, 29]. In the following we will use static feedback to maintain the length of the cavity and hence remove bistability.

To examine the displacement of the system from steady-state under the influence of noise we expand every operator as the sum of a mean value corresponding to its steady state [Eq.(4)] and a small fluctuation. For example, $a = a_s + \delta a$. Inserting analogous expressions for all operators into Eq. (2) and linearizing the resulting equations in the fluctuations yields the set of equations

$$\dot{u}(t) = Bu(t) + n(t), \quad (5)$$

where the vector of fluctuations is $u(t) = (\delta X_a, \delta Y_a, \delta \phi, \delta L_z)$, and the input noise vector is $n(t) = (\sqrt{\gamma}\delta X_a^{\text{in}}, \sqrt{\gamma}\delta Y_a^{\text{in}}, 0, \delta \epsilon_\phi^{\text{in}})$, where we have redefined the field fluctuations in terms of their quadratures as $\delta X_a = (\delta a + \delta a^\dagger)/\sqrt{2}$, $\delta Y_a = (\delta a - \delta a^\dagger)/i\sqrt{2}$, etc.

Further, B in Eq.(5) is a matrix (we do not reproduce it here for reasons of space) whose elements have to satisfy a sequence of algebraic inequalities which arise from the conditions for dynamical stability of the steady state solutions [Eq.(4)] formalized in terms of the Routh-Hurwitz criterion [30]. Below we will choose two laser fields, one for cooling and one for trapping, so that their combined effect stabilizes the mirror depending on the values of the effective moving mirror frequency and damping, which we now calculate.

We solve Eq. (5) by taking its Fourier transform and reducing it to a set of algebraic equations. Specifically we solve for the fluctuations in the displacement

$$\delta\phi(\omega) = \chi(\omega)\delta\tau(\omega), \quad (6)$$

where $\chi(\omega)$ is the susceptibility of the oscillating rear mirror and $\delta\tau(\omega)$ the total fluctuation in the torque acting on it, including both radiation and mechanical contributions [31]. The susceptibility has a Lorentzian shape, $\chi^{-1}(\omega) = I(\omega_{\text{eff}}^2 - \omega^2) - iD_{\text{eff}}\omega$, where the effective frequency and damping are given by

$$\begin{aligned} \omega_{\text{eff}}^2 &= \omega_\phi^2 - \frac{2\xi_\phi^2\gamma P_{\text{in}}}{I\omega_c} \frac{\Delta}{\Delta^2 + \frac{\gamma^2}{4}} \frac{(\frac{\gamma}{2})^2 - (\omega^2 - \Delta^2)}{[(\frac{\gamma}{2})^2 + (\omega - \Delta)^2][(\frac{\gamma}{2})^2 + (\omega + \Delta)^2]}, \\ D_{\text{eff}} &= D_\phi + \frac{2\xi_\phi^2\gamma P_{\text{in}}}{\omega_c} \frac{\Delta}{\Delta^2 + \frac{\gamma^2}{4}} \frac{\gamma}{[(\frac{\gamma}{2})^2 + (\omega - \Delta)^2][(\frac{\gamma}{2})^2 + (\omega + \Delta)^2]}, \end{aligned} \quad (7)$$

where $\Delta = \delta - \xi_\phi\phi_s$ is the full static detuning. The first and second terms on the right hand side of each of the Eqs. (7) represent the mechanical and optomechanical contributions respectively to the effective frequency and damping of the oscillating rear mirror. We note that the latter contributions are proportional to $\xi_\phi^2 \propto l^2$. The values of ω_{eff} and γ_{eff} we will use below are found by evaluating Eq.(7) at $\omega = \omega_\phi$.

As shown recently, ω_{eff} and γ_{eff} can be controlled almost independently by driving the cavity with two laser fields of different powers and detunings [3]. An intense ‘trapping’ field detuned (relatively) far above the cavity

resonance ($\Delta < 0$) makes the spring stiffer while introducing a slight anti-damping. A less intense ‘cooling’ field detuned below the cavity resonance ($\Delta > 0$) increases damping, overcompensating for the trapping field at the cost of also causing a small amount of anti-trapping. We propose a similar configuration here, with the trapping and cooling laser fields both being Gaussian beams.

To find the number of quanta of excitation of the rotor, we consider Eq.(6). For our model the torque fluctuations are chiefly due to Brownian noise, i.e. $\delta\tau \sim \delta\epsilon_\phi^{\text{in}}$. Further we will consider mirror cooling at temperatures $T \gg \hbar\omega_{\text{eff}}/k_B$, so the high-temperature limit of Eq.(3) may be used. In frequency-space this yields $\langle\delta\tau(\omega)\delta\tau(\omega')\rangle = 2D_\phi k_B T \delta(\omega + \omega')$, which when combined with Eq.(6) and Fourier-transformed gives $\langle\delta\phi(t)\delta\phi(t')\rangle = \frac{D_\phi k_B T}{\pi} \int_{-\infty}^{\infty} d\omega e^{-i\omega(t-t')} |\chi(\omega)|^2$ [27]. We set $t = t'$ in this expression and use the Lorentzian form of the susceptibility to find $\int_{-\infty}^{\infty} d\omega |\chi(\omega)|^2 = \pi/(I\omega_{\text{eff}}^2 D_{\text{eff}})$. We then introduce the equipartition theorem to relate $\langle\delta\phi(t)^2\rangle$ to T_{eff} , the effective temperature of the rear mirror : $k_B T_{\text{eff}}/2 = I\omega_{\text{eff}}^2 \langle\delta\phi^2(t)\rangle/2$. This implies

$$T_{\text{eff}} = \left(\frac{D_\phi}{D_{\text{eff}}}\right) T, \quad (8)$$

and therefore the number of rotational quanta of the oscillating rear mirror [32]

$$n = \frac{k_B T_{\text{eff}}}{\hbar\omega_{\text{eff}}} = \frac{k_B T}{\hbar\omega_{\text{eff}}} \left(\frac{D_\phi}{D_{\text{eff}}}\right). \quad (9)$$

We consider as an example a $10\mu\text{g}$ mirror of radius $10\mu\text{m}$ mounted on a torsional support with angular frequency $\omega_\phi = 2\pi \times 2.5\text{kHz}$ and a mechanical quality factor $\sim 10^5$. At room temperature $T = 300\text{K}$, this rotor has $n \sim 3 \times 10^8$ quanta.

We make the moving mirror part of a cavity $L = 1\text{mm}$ long. We choose $l = 100$ and a Gaussian beam with $P_{\text{in}}^t = 250\text{mW}$ at a detuning $\Delta^t = -2.5\gamma$ to trap and another Gaussian field with $P_{\text{in}}^c = 4\text{mW}$ at a detuning $\Delta^c = 0.5\gamma$ to cool the moving mirror, where $\gamma = 2\pi \times 10\text{MHz}$ implies an optical cavity finesse of $\sim 10^4$. This yields $\omega_{\text{eff}} \sim 10\omega_\phi$, $D_{\text{eff}} \sim 4 \times 10^4 D_\phi$ and $T_{\text{eff}} \sim 8\text{mK}$, indicating that the radiation can both trap and cool the mirror. The number of quanta is lowered to $n \sim 10^2$. In these calculations we have assumed static ($\omega = 0$) feedback to maintain the cavity length, which gives us control over Δ independent of input power as is usually implemented in the case of vibrational cooling [3]. With a mechanical quality factor twice as high and cryogenic lowering of the base temperature to $T \sim 3\text{K}$, $n < 1$ can be achieved, i.e. the mirror can be brought to its ground state.

Having demonstrated that the proposed technique is promising for achieving ground state occupation by the rotor, we make three comparisons to the standard case of vibrational cooling using linear momentum. First,

in practice it is not easy to increase the linear momentum of the cooling photons (it usually entails changing the laser), but high- l Laguerre-Gaussian modes can be achieved readily [19]. Further the optomechanical effects of rotational cooling enjoy a quadratic scaling with the angular momentum as shown above, while in the vibrational case the scaling goes linearly with the linear momentum [3]. Thus a Laguerre-Gaussian mode with sufficiently large charge can bring the rotor to its ground state even with the use of moderate laser power. This is an advantage from the point of view of mirror heating effects.

Second, an interesting scenario arises if the rear mirror is allowed to vibrate in addition to rotating. Since it can possess linear as well as angular momentum, the same light field can then couple to both modes of mirror motion.

Lastly, it has recently been predicted that the sensitivity of a detuned cavity with a linearly vibrating mirror to a force causing a change in the cavity length can be improved beyond the standard quantum noise limit [17, 18]. This analysis can be adapted to our case and implies that the design presented here may be useful as a sensitive torque-to-displacement transducer in the limit where classical noise has been suppressed, i.e. in the quantum regime.

In conclusion we have demonstrated that orbital angular momentum exchange with a Laguerre-Gaussian mode enables a classical rotor to release its excitation quanta, in principle until it reaches its ground state. This work is supported in part by the US Office of Naval Research, by the National Science Foundation, and by the US Army Research Office. We would like to thank H. Uys, O. Dutta and C. Maes for stimulating discussions.

Note: There appeared in Ref. [33], after the submission of this work, a proposal for using electronic spin-orbit interactions in semiconductors to cool torsional nanomechanical vibrations.

-
- [1] P. Meystre, *Atom Optics* (Springer-Verlag, Berlin, 2001).
 - [2] V. S. Letokhov, *Laser Control of Atoms and Molecules* (Oxford University Press, Oxford, 2007).
 - [3] T. Corbitt *et. al*, Phys. Rev. Lett **98**, 150802 (2007).
 - [4] S. Gigan *et. al*, Nature **444**, 67 (2006).
 - [5] D. Kleckner and D. Bouwmeester, Nature **444**, 75 (2006).
 - [6] O. Arcizet, P. -F. Cohadon, T. Briant, M. Pinard, and A. Heidmann, Nature **444**, 71 (2006).
 - [7] A. Schliesser, P. Del’Haye, N. Nooshi, K. J. Vahala, and T. J. Kippenberg, Phys. Rev. Lett. **97**, 243905 (2006).
 - [8] A. J. Leggett, J. Phys. Condens. Matter **14**, R415 (2002).
 - [9] W. Marshall, C. Simon, R. Penrose, and D. Bouwmeester, Phys. Rev. Lett. **91**, 130401 (2003).
 - [10] P. Treutlein, D. Hunger, S. Camerer, T. W. Hänsch, and J. Reichel, arXiv:quant-ph/0703199v1 (2007).
 - [11] C. M. Caves, Phys. Rev. Lett. **45**, 75 (1980).
 - [12] J.-M. Courty, A. Heidmann, and M. Pinard, Phys. Rev. Lett. **90**, 083601 (2003).
 - [13] G. J. Milburn, K. Jacobs, and D. F. Walls, Phys. Rev. A **50**, 5256 (1994).
 - [14] T. Carmon, H. Rokhsari, L. Yang, T. J. Kippenberg, and K. J. Vahala, Phys. Rev. Lett. **94**, 223902 (2005).
 - [15] T. Carmon and K. J. Vahala, Phys. Rev. Lett. **98**, 123901 (2007).
 - [16] I. Tittonen *et. al*, Phys. Rev. A **59**, 1038 (1999).
 - [17] A. Buonanno and Y. Chen, Phys. Rev. D **65**, 042001 (2002).
 - [18] O. Arcizet, T. Briant, A. Heidmann, and M. Pinard, Phys. Rev. A **73**, 033819 (2006).
 - [19] L. Allen, S. M. Barnett, and M. J. Padgett, *Optical Angular Momentum* (The Institute of Physics Pub. Inc., London, 2004), 1st ed.
 - [20] H. He, M. E. J. Friese, N. R. Heckenberg, and H. Rubinsztein-Dunlop, Phys. Rev. Lett. **75**, 826 (1995).
 - [21] G. Volpe and D. Petrov, Phys. Rev. Lett. **97**, 210603 (2006).
 - [22] M. F. Andersen, C. Ryu, P. Cladé, V. Natarajan, A. Vaziri, K. Helmerson, and W. D. Phillips, Phys. Rev. Lett. **97**, 170406 (2006).
 - [23] S. S. R. Oemrawsingh, E. R. Eliel, J. P. Woerdman, E. J. K. Verstegen, J. G. Kloosterboer, and G. W. ’t Hooft, Opt. Comm. **96**, 123 (1993).
 - [24] A. V. Kudryashov, and A. H. Paxton, *Laser Resonators III* (Bellingham, Washington, 2000).
 - [25] M. V. Vasnetsov, J. P. Torres, D. V. Petrov, and Lluis Torner, Opt. Lett. **28**, 2285 (2003).
 - [26] M. W. Beijersbergen, L. Allen, H. E. L. O. van der Veen, and J. P. Woerdman, Opt. Comm. **96**, 123 (1993).
 - [27] C. Gardiner, *Quantum Noise* (Springer-Verlag, Berlin, 1991).
 - [28] P. Meystre, E. M. Wright, J. D. McCullen, and E. Vignes, J. Opt. Soc. Am. B **2**, 1830 (1985); J. D. McCullen, P. Meystre, and E. M. Wright, Optics Letters **9**, 193 (1984).
 - [29] S. Mancini and P. Tombesi, Phys. Rev. A **49**, 4055 (1994).
 - [30] E. X. DeJesus and C. Kaufman, Phys. Rev. A **35**, 5288 (1987).
 - [31] P. F. Cohadon, A. Heidmann, and M. Pinard, Phys. Rev. Lett. **83**, 3174 (1999).
 - [32] M. Bhattacharya and P. Meystre, in preparation.
 - [33] N. Zhao, D. L. Zhao, J. -L. Zhu, and C. P. Sun, arXiv:0705.1964v1 (2007).